


ES3-125M5C

EdgeTech
SOLAR
INTERNATIONAL Ltd.

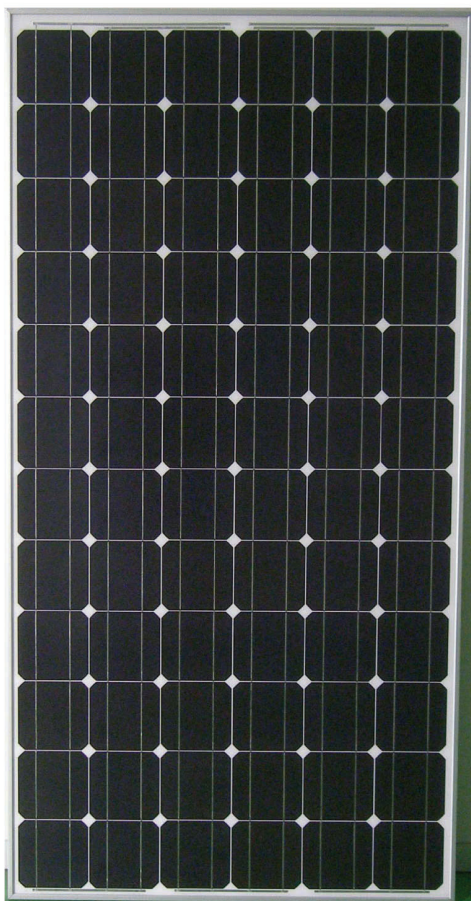

Features

High conversion efficiency of solar cell.

White tempered glass, EVA resin, weather proof film and anodized aluminum frame provide efficient protection from the severest environmental conditions.

Perfect for grid applications.

EdgeTech Solar photovoltaic modules are produced in a ISO9001 qualified factory using the highest quality materials and excellent quality control. Each module must undergo an extensive series of performance tests putting the module under extreme electrical and mechanical conditions to assure each module meets or exceeds specifications for many years of reliable performance even in the most challenging of environments.

QUALITY COMPONENTS

HIGH PERFORMANCE

RELIABLE

DURABLE

20 YEAR WARRANTY

On the Edge of Today's
Energy Technology



ES3-125M5C

ELECTRICAL CHARACTERISTICS

Type of Module	Mono crystalline
Maximum Power Rating (Pmax)	125 Watts
Maximum Power Tolerance ±	3 %
Open-Circuit Voltage (Voc)	44.5 Volts
Short-Circuit Current (Isc)	3.85 Amps
Maximum Power Voltage (Vmp)	36 Volts
Maximum Power Current (Imp)	3.48 Amps
Cell Size (72 pcs)	125x90 mm
Solar Cell Efficiency	16.0 %
Maximum System Voltage	1000 Volts DC
Temperature Range	-40 to 85 °C
Nominal Voltage	24 Volts

TEMPERATURE COEFFICIENTS

Short-Circuit Current Temp Coefficient	+0.10 mA/°C
Open-Circuit Voltage Temp Coefficient	-0.380 V/°C
Maximum Power Temp Coefficient	-0.470 %/°C

MECHANICAL CHARACTERISTICS

Dimensions	1170x808x35 mm
Weight	11.0 kg
Surface Maximum Load Capacity	60m/s(200kg/sq.m)
Allowable Hail Load	225g steel ball 1m

WARRANTY

Workmanship & Product Warranty	2 years
Power Output Warranty 20 years	80% Power

CERTIFICATIONS

ISO



EdgeTechSolar International Ltd.

32H Nam Shan Village
New Territory, Hong Kong, China SAR

US Toll Free 1.800.209.0909
US Tel 1.650.488.8300
HK Tel 852.8120.7887

Sales@EdgetechSolar.com
www.EdgetechSolar.com

DIMENSIONS

