


ES8-235W-M6-G

EdgeTech
SOLAR
INTERNATIONAL Ltd.

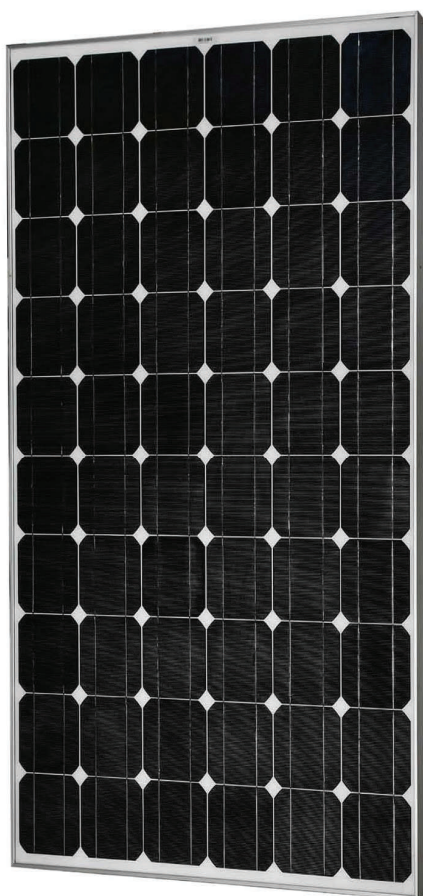

Features

Junction Box

Medium sized waterproof junction box made of PPO, without cable.

Diodes

3 pcs of 10A, 10V bypass diodes included

Construction

Front: High-transmission tempered glass, 3.2 mm in thickness
Back: Tedlar, encapsulation: EVA

Frame

Clear anodized aluminum alloy 6063-T6 frame,
World class design in silver.

EdgeTech Solar photovoltaic modules are produced in a ISO9001 qualified factory using the highest quality materials and excellent quality control. Each module must undergo an extensive series of performance tests putting the module under extreme electrical and mechanical conditions to assure each module meets or exceeds specifications for many years of reliable performance even in the most challenging of environments.

QUALITY COMPONENTS

HIGH PERFORMANCE

RELIABLE

DURABLE

25 YEAR WARRANTY

On the Edge of Today's
Energy Technology



ES8-235W-M6-G

ELECTRICAL CHARACTERISTICS

Type of Module	Mono	crystalline
Maximum Power Rating (Pmpp)	235	Watts
Maximum Power Tolerance ±	3	%
Open Circuit Voltage (Voc)	36.96	Volts
Short Circuit Current (Isc)	8.23	Amps
Maximum Voltage Power (Vmpp)	30.91	Volts
Maximum Current Power (Impp)	7.61	Amps
Efficiency Rating	14.56	%
Nominal Voltage	20	Volts

MECHANICAL CHARACTERISTICS

Dimensions	1636 x 987 x 40 mm	
Weight	18.5 kg	
Solar Cells - Cell Size - Matrix	60	156x156mm 6x10
Packing	44 pcs/1 pallet	
Container Loading Capacity	308pcs/20ft	616pcs/40ft

TEMPERATURE RANGE

Temperature Range	- 40° C to 85° C
Damp Heat	85% RH
Static Load Front and Back	2400 pascals
Front Loading	5400 pascals
Hail Impact	25mm steel ball at 23m/s

WARRANTY

Workmanship & Product Warranty	5 years
Power Output Warranty 12 years	90% Power
Power Output Warranty 25 years	80% Power

CERTIFICATIONS

TUV UL IEC CE RoHS ISO





EdgeTechSolar International Ltd.

32H Nam Shan Village
New Territory, Hong Kong, China SAR

US Toll Free 1.800.209.0909
US Tel 1.650.488.8300
HK Tel 852.8120.7887

Sales@EdgetechSolar.com
www.EdgetechSolar.com

IV CURVES

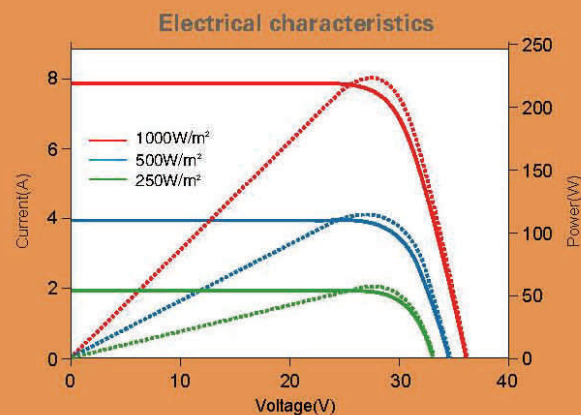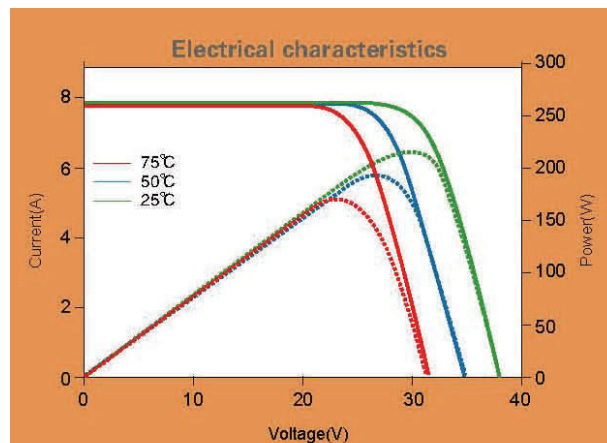

At STC (Standard Test Conditions) 1000W/m²
25°C cell temperature, AM1.5 spectrum

DIMENSIONS

